

MICROGEL



ESPOSITORE ORIZZONTALE DA BANCO PER GELATO E GASTRONOMIA HORIZONTAL COUNTER ICE CREAM AND GASTRONORM SHOWCASE

- Filtro condensatore rimovibile
- Allarme pulizia filtro condensatore
- Telaio in acciaio con fianchi e cappa superiore apribile in PMMA
- Griglie di ventilazione in acciaio inox, integrate nelle carenature
- Cappa in PMMA apribile lato operatore con maniglia cromata
- Predisposta con traversine inox per composizione vaschette per gelato
- Illuminazione LED ad elevata efficienza luminosa e risparmio energetico
- Centralina elettronica con display e comandi integrati
- Piedini di serie

ACCESSORI:

- Vaschette
- Supporti per stecchi gelato e ghiaccioli
- Piano refrigerato per esposizione pasticceria

- Removable condenser filter
- Condenser filter cleaning alarm
- Stainless steel frame with PMMA sides and upper opening cover
- Stainless steel ventilation grids, integrated in the structure
- PMMA cover with chromed handles, opening from operator side
- Predisposed with stainless steel bars for ice cream stainless steel basins
- LED lighting with high luminous efficiency and energy savings
- Electronic control unit with display and integrated control panel
- Feet as standard

ACCESSORIES:

- Basins
- Supports for ice cream and popsicle sticks
- Refrigerated top display for pastry

MICROGEL 4



MICROGEL 2-3-4

ACCESSORIO/ACCESSORY:

Piano refrigerato per esposizione gelati e semifreddi
Ice cream and semi-frozen refrigerated top display




MICROGEL 3 GN



MICROGEL 2-3-4 GN

ACCESSORIO/ACCESSORY:

Piano refrigerato per esposizione pasticceria
Refrigerated top display for pastry

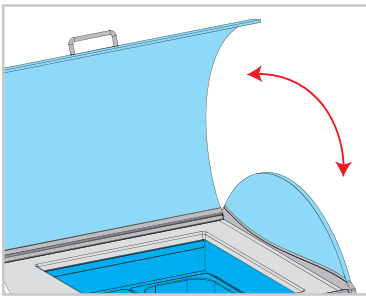

Colori standard
Standard colors



	°C	LxPxH mm	N° - mm. STANDARD	N° - mm. MAX	Watt	% U.R.	DEFROST	H ₂ O			Kg.		
Microgel 2	-15/+18	722x560x467	-	n° 4 - Lt. 2,5 o n° 2 - Lt. 5 / Lt. 7	190			MAN		R290	32	-	LED Standard
Microgel 3	-15/+18	897x560x467	-	n° 6 - Lt. 2,5 o n° 3 - Lt. 5 / Lt. 7	190			MAN		R290	35	-	LED Standard
Microgel 4	-15/+18	1072x560x467	-	n° 8 - Lt. 2,5 o n° 4 - Lt. 5 / Lt. 7	190			MAN		R290	40	-	LED Standard
Microgel 2 GN	+2/+8	722x560x467	-	n° 2 GN 1/3 o n° 4 GN 1/6 h. 100 o 150 mm.	190	-		MAN		R290	32	-	LED Standard
Microgel 3 GN	+2/+8	897x560x467	-	n° 3 GN 1/3 o n° 6 GN 1/6 h. 100 o 150 mm.	190	-		MAN		R290	35	-	LED Standard
Microgel 4 GN	+2/+8	1072x560x467	-	n° 4 GN 1/3 o n° 8 GN 1/6 h. 100 o 150 mm.	190	-		MAN		R290	40	-	LED Standard

Voltaggio di serie - Standard voltage: 230v/1/50Hz • Classe climatica - Climatic class: MAX = (25°C - % U.R. 60)